

FALKO

With just three basic elements, the FALKO bracket scaffold can adapt to any ground plan, providing safe working areas.



At Work For You

HÜNNEBECK 

BY BRAND SAFWAY

FALKO is the name of our folding bracket scaffold, which is supplied to the construction site in its folded state. Set up the guardrail, secure the diagonals, and then lift the complete unit with a crane to the desired position – ready.

▶ Product benefits

Safe

Additional safety due to the structured surface of planks providing necessary slip-resistance even when wet

Corner platform with corner railing for safe working areas even around corners

Economical

Space-saving storage with a storage height of only 23.50 cm per bracket platform

FALKO bracket platforms can be pre-assembled and arrive on site ready-to-use

Versatile

FALKO adapts to any building shape and ground plan

Respective railings for all platform types and adjustment sections


With the support triangle, the bracket scaffold can be employed on buildings with a skeleton construction or on facades with large wall openings



▶ Additional safety due to the structured surface of planks providing necessary slip-resistance even when wet

► Technical data

Product description	FALKO working and protective scaffold
Material	Steel
Main platform types	Bracket platform 250 Corner platform
Platform dimensions	Bracket platform 250: length = 2.50 m width = 1.50 m Corner platform: length = 0.65 m & 0.65 m width = 1.50 m
Adjustment section	Adjustment section 250 Adjustment section 125
Dimensions	Adjustment section 250: length = 2.85 m width = 1.28 m Adjustment section 125: length = 1.60 m width = 1.28 m
Railing types	Railing 250 Corner railing Railing adjustment 250 Railing adjustment 125 Cross railing
Railing heights	1.00 m 2.00 m (when stacked for roofer's safety scaffold)
Load capacity	Up to 3.0 kN/m ²
Corrosion protection	Fully galvanised steel components Aluminium-zinc coating
Relevant standards	Scaffold class 4 EN 12811

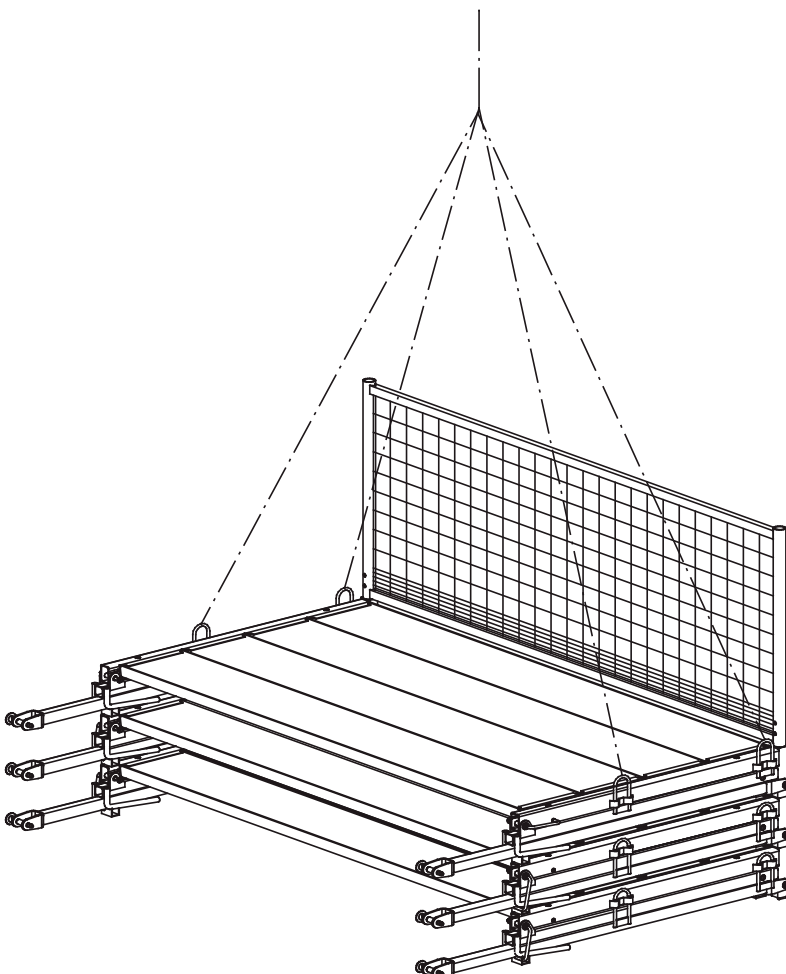

◀ A folded bracket platform is only 23.5 cm high. The bracket platforms can be stacked, a stack can contain a maximum of five FALKO bracket platforms. The bundles are strapped with galvanised steel tapes.

▶ Applications up to 100 m above the ground possible with just a 1 m high side protection



▶ Corner platform with corner railing for safe working areas even around corners

Application & use

- ▶ Working scaffold
- ▶ Safety scaffold
- ▶ Roofer's safety scaffold